

Pro-face

by **Schneider** Electric

Product Guide

2016

- | Touch Operator Interface
- | Industrial Flat Panel Monitor
- | Operator Interface Plus Control
- | Software
- | Industrial PC



**SCIENCE
GATE**
Your Automation Partner



SCIGATE AUTOMATION (S) PTE LTD

No.1 Bukit Batok Street 22 #01-01 Singapore 659592

Tel: (65) 6561 0488

Fax: (65) 6562 0588

Email: sales@scigate.com.sg

Web: www.scigate.com.sg

Business Hours: Monday - Friday 8.30am - 6.15pm

for the best interface

www.proface.com

Contents

Smart Portal

Page
03

SP5000 SERIES
Display Module / Box Module



Industrial PC

Page
04


Page
09

PS5000 / PS4000 SERIES



Page
09

**PE4000
SERIES**



Touch Operator Interface

Page
05

Page
06

GP4000 SERIES
Standard / W / Modular / Compact



Page
06

GP3000 SERIES
Multimedia / Handy



Industrial Flat Panel Monitor

Page
10

**FP5000
SERIES**



Operator Interface Plus Control

Page
07

**LT4000M / LT3000
SERIES**



Page
06

GP3000 SERIES
Control



Software

Page
11

Pro-face Remote HMI
Remote Monitoring Software for mobile

Page
11

GP-Pro EX
HMI Screen Editor & Logic Programming Software

Page
13

Pro-Server EX
Data Management Software

Page
13

Camera-Viewer EX
Camera Remote Monitoring Software

Page
13

GP-Viewer EX
Screen Remote Monitoring Software

Page
10

WinGP
HMI Runtime Engine for PC

Smart Portal: SP5000_{SERIES}

Smart Portal connects information and people for optimal communication.



Valuable information in the right format



Having more information is not necessarily better than having less. Value is created when the right information reaches the right people in the right format.

Bring your factory closer to your office



By segmenting the network, Smart Portal makes it possible to connect factories and offices while ensuring the highest security.

Simple to use —any time, any place



Overseas production and the diversification of market needs have increased the need for efficient machine setup and maintenance.

Check out the Movies

http://www.proface.com/product/smart_portal/sp5000.html



Smart Portal: SP5000_{SERIES}

Display X Box module design provides flexible functionality and size.

15" Premium  SP-5700TP 16 million colors TFT 1,024 × 768 pixels (XGA) - Resistive Film (analog, multi-touch) - Auto Scaling - Color Variation Brightness Sensor USB (Host) USB (Device) DC Wireless LAN	12" Premium  SP-5660TP 16 million colors TFT 1,024 × 768 pixels (XGA) - Resistive Film (analog, multi-touch) - Auto Scaling - Color Variation Brightness Sensor USB (Host) USB (Device) DC Wireless LAN	12" Premium  SP-5600TP 16 million colors TFT 1,024 × 768 pixels (XGA) - Resistive Film (analog, multi-touch) - Auto Scaling - Color Variation Brightness Sensor USB (Host) USB (Device) DC Wireless LAN	12" wide Advanced  SP-5600WA 262,144 colors TFT 1,280 × 800 pixels (WXGA) - Resistive Film (analog) - Color Variation Brightness Sensor USB (Host) USB (Device) DC Wireless LAN	
10" Premium  SP-5500TP 16 million colors TFT 800 × 600 pixels (SVGA) - Resistive Film (analog, multi-touch) - Auto Scaling - Color Variation Brightness Sensor USB (Host) USB (Device) DC Wireless LAN	10" wide Advanced  SP-5500WA 262,144 colors TFT 1,280 × 800 pixels (WXGA) - Resistive Film (analog) - Color Variation Brightness Sensor USB (Host) USB (Device) DC Wireless LAN	7" wide Advanced  SP-5400WA 262,144 colors TFT 800 × 480 pixels (WVGA) - Resistive Film (analog) - Color Variation Brightness Sensor USB (Host) USB (Device) DC Wireless LAN	Box Open  SP-5B40 - Data Backup 320 KB - Application 64MB (Screen Size) - Application approx. 5GB (Free Space) Ethernet 2ch COM 2 ch AUX 1ch DVI-D 1ch Audio Input 1ch USB (Host) 3ch USB (Device) 1ch DC	Box Power  SP-5B10 - Data Backup 320 KB - Application 64MB (Screen Size) - Built-in Control Program Ethernet 2ch COM 2 ch AUX 1ch DVI-D 1ch Audio Input 1ch USB (Host) 2ch USB (Device) 1ch DC

12 Combinations

Premium Display

High performance display supports multi-touch operation and provides brightness sensor and auto-scaling.



Advanced Display

The wide-screen display can display a large amount of information.



Open Box

Able to run a variety of Windows applications on WES7. (equipped with HMI Runtime standard)



Power Box

Solid box achieves high-speed processing and fast display.



For further informations, visit our website.

http://www.proface.com/product/smart_portal/sp5000.html



Industrial PC: PS5000_{SERIES}

Highest-performance Industrial Personal Computer

22" wide Modular Type



PS-5900W

- 1,920 × 1,080 pixels (FHD)
- Core i7 1.7GHz or Celeron 2980U 1.6GHz
- Windows 7 , 8.1 Inds., Embedded
- HDD, SSD or CFast card- selectable
- Multi touch by capacitive

Ethernet 2ch
COM 1 ch
USB 4ch
mPCIe 2ch
2 slot (1xPCI+1xPCIe, 2xPCI, 2xPCIe) or 0 slot

19" wide Modular Type



PS-5800W

- 1,366 × 768 pixels (FWXGA)
- Core i7 1.7GHz or Celeron 2980U 1.6GHz
- Windows 7 , 8.1 Inds., Embedded
- HDD, SSD or CFast card- selectable
- Multi touch by capacitive

Ethernet 2ch
COM 1 ch
USB 4ch
mPCIe 2ch
2 slot (1xPCI+1xPCIe, 2xPCI, 2xPCIe) or 0 slot

15" wide Modular Type



PS-5700W

- 1,366 × 768 pixels (FWXGA)
- Core i7 1.7GHz or Celeron 2980U 1.6GHz
- Windows 7 , 8.1 Inds., Embedded
- HDD, SSD or CFast card- selectable
- Multi touch by capacitive

Ethernet 2ch
COM 1 ch
USB 4ch
mPCIe 2ch
2 slot (1xPCI+1xPCIe, 2xPCI, 2xPCIe) or 0 slot

15" Modular Type



PS-5700T

- 1,024 × 768 pixels (XGA)
- Core i7 1.7GHz or Celeron 2980U 1.6GHz
- Windows 7 , 8.1 Inds., Embedded
- HDD, SSD or CFast card- selectable
- Single touch by resistive

Ethernet 2ch
COM 1 ch
USB 5ch
mPCIe 2ch
2 slot (1xPCI+1xPCIe, 2xPCI, 2xPCIe) or 0 slot

19" wide Slim Type



PS-5811W

- 1,366 × 768 pixels (FWXGA)
- Core i3 4010U 1.7GHz
- Windows 7 , 8.1 Inds., Embedded
- HDD, SSD or CFast card- selectable
- Multi touch by capacitive

Ethernet 2ch
COM 1 ch
USB 2ch
mPCIe 2ch
0 slot

19" wide Slim Type (Enclosed model)



PS-5821W

- 1,366 × 768 pixels (FWXGA)
- Core i3 4010U 1.7GHz
- Windows 7 , 8.1 Inds., Embedded
- HDD, SSD or CFast card- selectable
- IP66 (All around)
- Multi touch by capacitive

Ethernet 2ch
COM 1 ch
USB 2ch
mPCIe 2ch
0 slot

15" wide Slim Type



PS-57*1W

- 1,366 × 768 pixels (FWXGA)
- Core i3 4010U 1.7GHz, Atom E3827 1.75GHz
- Windows 7 , 8.1 Inds., Embedded
- HDD, SSD or CFast card- selectable
- Multi touch by capacitive

Ethernet 2ch
COM 1 ch
USB 2ch
mPCIe 2ch
0 slot

10" wide Slim Type



PS-5501W

- 1,280 × 800 pixels (WXGA)
- Atom E3827 1.75GHz
- Windows 7 , 8.1 Inds., Embedded
- HDD, SSD or CFast card- selectable
- Multi touch by capacitive

Ethernet 2ch
COM 1 ch
USB 2ch
mPCIe 2ch
0 slot

BOX BOX Type



PS-5000B

- Core i7 1.7GHz or Celeron 2980U 1.6GHz
- Windows 7 , 8.1 Inds., Embedded
- HDD, SSD or CFast card- selectable

Ethernet 2ch
COM 1 ch
USB 4ch
mPCIe 2ch
2 slot (1xPCI+1xPCIe, 2xPCI, 2xPCIe) or 0 slot

For further informations, visit our website.

<http://www.pro-face.com/product/ipc/ps5000/index.html>




Touch Operator Interface: GP4000_{SERIES}

The GP4000 Series brings high performance with an even more user-friendly interface.



GP-460xT


- 65,536-color TFT
- 800 × 600 pixels (SVGA)
- Analog or Matrix Touch Panel
- Application 32MB
- Data Backup 320KB
- Alarm Analysis Database
- Built-in Control Program
- Replaceable Battery
- Color Variation



Coated models are available
COM-isolated models are available

GP-450xT


- 65,536-color TFT
- 640 × 480 pixels (VGA)
- Analog or Matrix Touch Panel
- Application 32MB
- Data Backup 320KB
- Alarm Analysis Database
- Built-in Control Program
- Replaceable Battery
- Color Variation



Coated models are available
COM-isolated models are available


GP-4401T

- 65,536-color TFT
- 640 × 480 pixels (VGA)
- Analog Touch Panel
- Application 32MB
- Data Backup 320KB
- Alarm Analysis Database
- Built-in Control Program
- Replaceable Battery
- Color Variation



GP-430xT


- 65,536-color TFT
- 320 × 240 pixels (QVGA)
- Analog Touch Panel
- Application 16MB
- Data Backup 320KB
- Alarm Analysis Database
- Built-in Control Program
- Replaceable Battery
- Color Variation




Coated models are available
COM-isolated models are available

GP-420xT

- 65,536-color TFT
- 320 × 240 pixels (QVGA)
- Analog Touch Panel
- Application 16MB
- Data Backup 320KB
- Alarm Analysis Database
- Built-in Control Program
- Color Variation




COM-isolated models are available

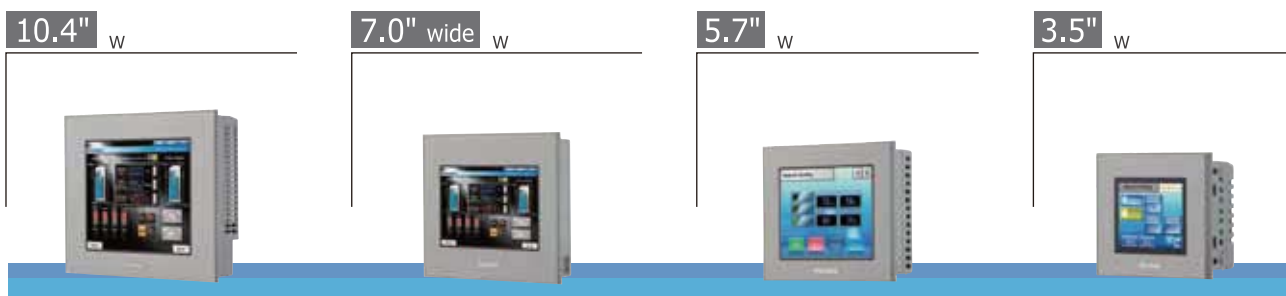


GP-4501TW

- 65,536-color TFT
- 640 × 480 pixels (VGA)
- Analog Touch Panel
- Application 16MB
- Data Backup 128KB
- Built-in Control Program
- Color Variation




GP-4401WW

- 65,536-color TFT
- 800 × 480 pixels (WVGA)
- Analog Touch Panel
- Application 16MB
- Data Backup 128KB
- Built-in Control Program
- Color Variation



GP-4301TW


- 65,536-color TFT
- 320 × 240 pixels (QVGA)
- Analog Touch Panel
- Application 8MB
- Data Backup 128KB
- Built-in Control Program
- Color Variation



Coated models are available

GP-4201TW

- 65,536-color TFT
- 320 × 240 pixels (QVGA)
- Analog Touch Panel
- Application 8MB
- Data Backup 128KB
- Built-in Control Program
- Color Variation




For further informations, visit our website.

<http://www.pro-face.com/product/hmi/gp4000/index.html>



Touch Operator Interface: GP4000_{SERIES}

The GP4000 Series brings high performance with an even more user-friendly interface.

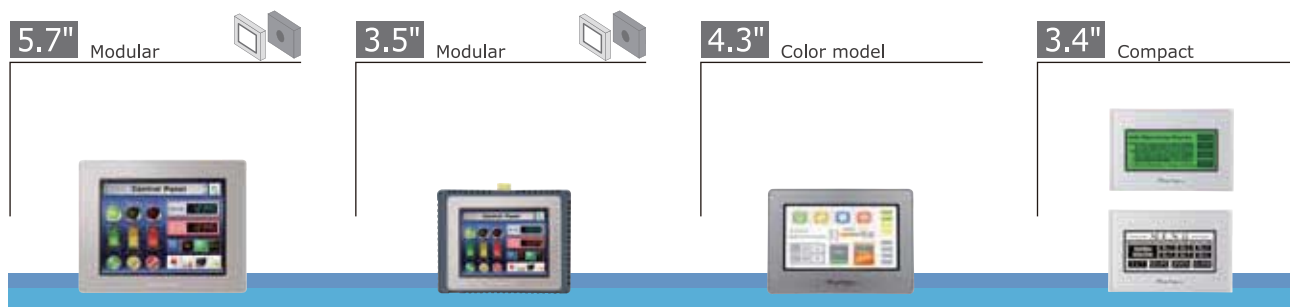

GP-4301TM

- 65,536-color TFT
- 320 × 240 pixels (QVGA)
- Analog Touch Panel
- Application 8MB
- Data Backup 128KB

Ethernet
COM 1 ch
SD Card
USB (Host) USB (Device)
AC DC

GP-4201TM

- 65,536-color TFT
- 320 × 240 pixels (QVGA)
- Analog Touch Panel
- Application 8MB
- Data Backup 128KB

Ethernet
COM 1 ch
SD Card
USB (Host) USB (Device)
AC DC

GP4100T

- 64,000 colors TFT
- 480 × 272 pixels
- Analog Touch Panel
- Application 8MB
- Data Backup 128KB

Ethernet *1
COM 1 ch *2
SD
USB (Host) USB (Device)
AC DC

*1: GP-4114T only
*2: Excluding GP-4114T

GP-4100


- 16-shades Mono
- 3-color Switchable Backlight
- 200 × 80 pixels
- Analog Touch Panel
- Application 2.2MB
- Data Backup 128KB

Ethernet *1
COM 1 ch *2
SD Card
USB (Host) USB (Device)
AC DC


COM-isolated models are available
*1: GP-4104 only
*2: Excluding GP-4104

Touch Operator Interface: GP3000_{SERIES}

The GP3000 Series is available in a wide variety of sizes from 5.7" to 15".

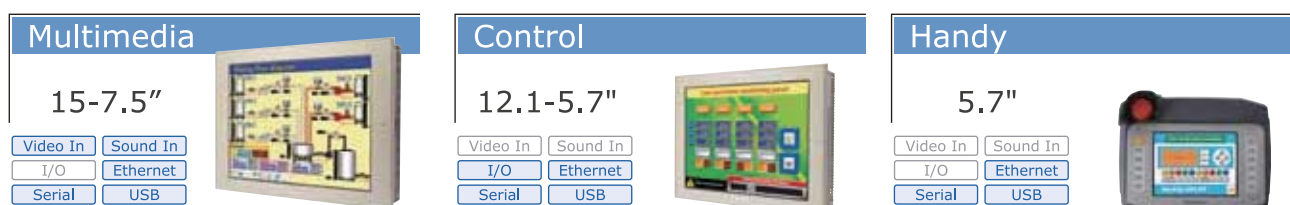

Easily connect multiple USB devices

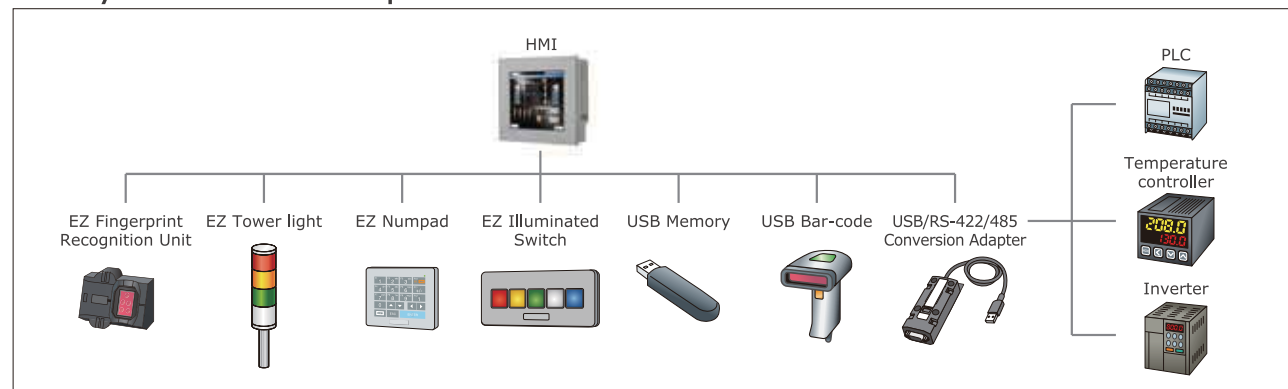


For further informations, visit our website.

<http://www.pro-face.com/product/hmi/gp4000/index.html>




Operator Interface Plus Control: LT4000M/3000^{SERIES}

Controllers with touch operator interface

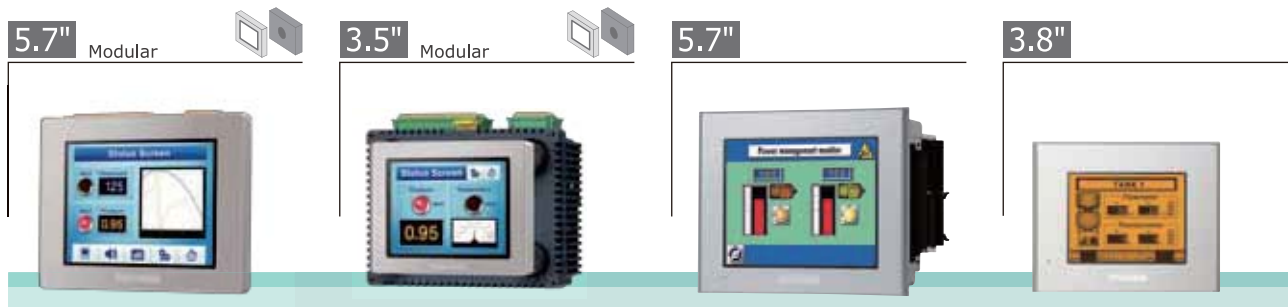

LT-4301TM


- 65,536-color TFT
- 320 × 240 pixels (QVGA)
- Analog Touch Panel
- Application 16MB
- Data Backup 256KB
- Built-in Control Program
- Alarm Analysis Database



*Analog model only

LT-4201TM


- 65,536-color TFT
- 320 × 240 pixels (QVGA)
- Analog Touch Panel
- Application 16MB
- Data Backup 256KB
- Built-in Control Program
- Alarm Analysis Database



*Analog model only

LT-330xT


- 65,536-color TFT
- 320 × 240 pixels (QVGA)
- Analog Touch Panel
- Application 6MB
- Data Backup 128KB
- Built-in Control Program



*Requires an optional Master Unit.


LT-3201A

- 8-shades Mono
- Amber/ Red Backlight
- 320 × 240 pixels (QVGA)
- Analog Touch Panel
- Application 6MB
- Data Backup 128KB
- Built-in Control Program



*Requires an optional Master Unit.

Connect to a wide range of industrial devices

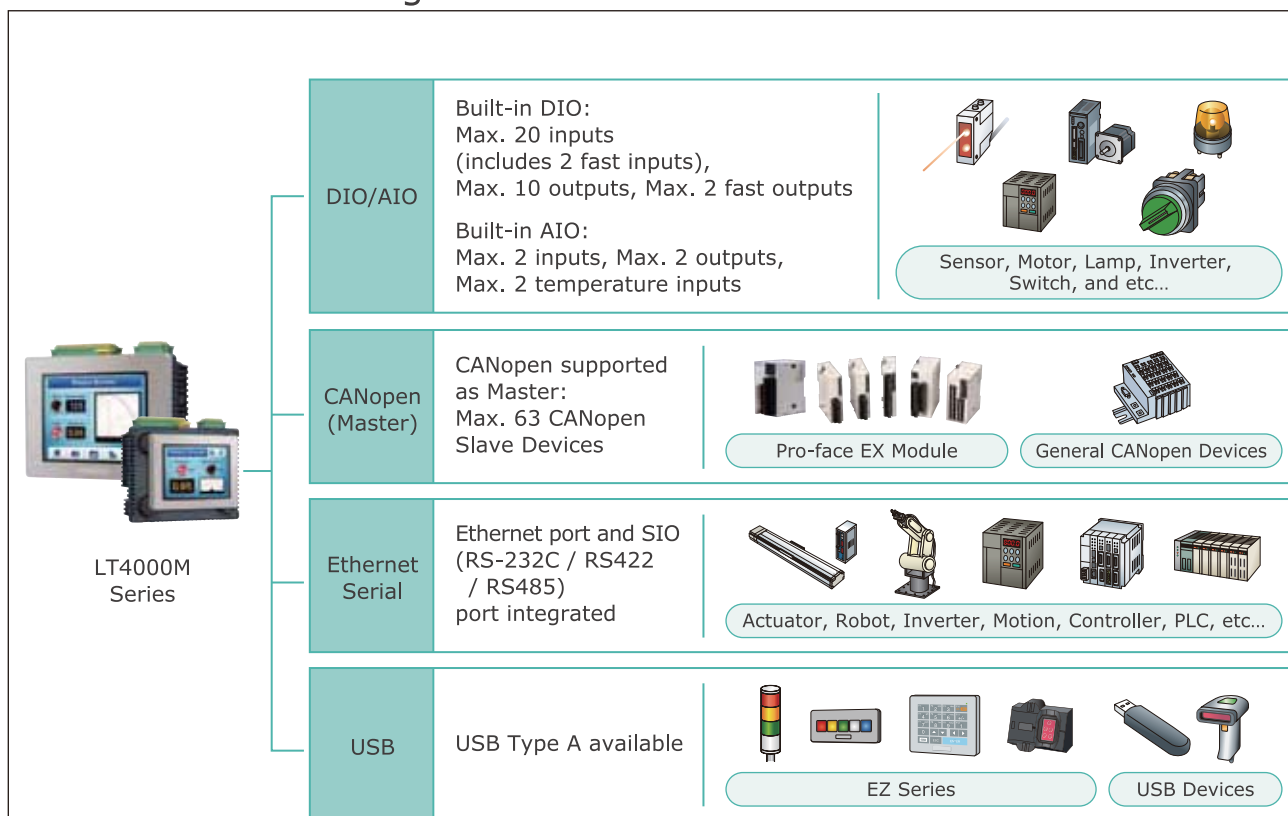


For further informations, visit our website.

http://www.pro-face.com/product/hmi_control/index.html



LT4000M Series feature: All-in-one Unit


All-in-one design makes it easy to keep equipment compact and allows installation in a $\phi 22$ mm hole for easy panel mounting.* Easily troubleshoot equipment by replacing the display unit or the control unit.

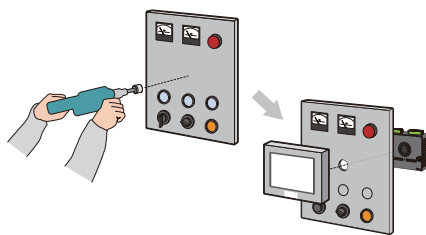

* The 22mm hole is the standard size used for buttons or lamps.

LT4000M Series feature: Flexible Installation

Use a separation cable* to install the control unit on a DIN rail and the operation unit in a different location. Operation unit is space- saving, and it allows you to install flexibly even where it is difficult to install due to limitations of space.

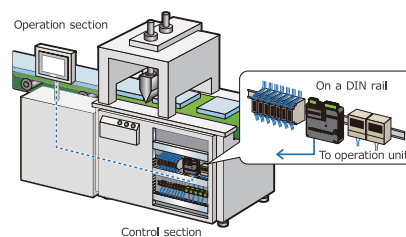

* 3m and 5m cables are available.

I/O Expansion Unit



	EX Expansion Module		CANopen Remote I/O	FLEXNETWORK Remote I/O
Master	—		CANopen Master	—
Input	8-point Input	16-point Input	—	32-point Input
Output	8-point Relay Output, 8-point Sink Output, 8-point Source Output	16-point Relay Output, 16-point Sink Output, 16-point Source Output	—	—
Input/ Output	4-point Input/ 4-point Output, 16-point Input/ 8-point Relay Output		CANopen Slave HTB (12-point Input/ 2-point Source Output/ 6-point Relay Output)	16-point Input/ 16-point Output, 32-point Input/ 32-point Output
Analog	2-ch Analog Input, 2-ch Analog Input/ 1-ch Analog Output, 4-ch Analog Input/ 2-ch Analog Output	1-ch Analog Output, 2-ch Analog Output	—	2-ch Analog Input, 2-ch Analog Output
Temperature	2-ch Thermocouple Pt100 Input/ 1-ch Analog Output, 4-ch Voltage, Current, Pt100/ Pt1000/ Ni100/ Ni1000 Input, 8-ch Temperature Pt100/ Pt1000 Input		—	—

For further informations, visit our website.

http://www.pro-face.com/product/hmi_control/index.html



Industrial PC: PS4000/PE4000B SERIES

Industrial PC

19"



PS-4800

- 1,280 x 1,024 pixels (SXGA)
- Intel® Core™ 2 Duo P8400 2.26GHz or Intel® Atom™ N270 1.6GHz
- Windows® XP, 7, Embedded
- HDD, SSD or CF card-selectable
- Fanless model is available

Ethernet 2 ch
COM 2 ch
USB 5 ch
CF Card
PCI 1 ch or none
PCIe 1 ch or none
DVI-I
AC
DC

15"



PS-4700

- 1,024 x 768 pixels (XGA)
- Intel® Core™ 2 Duo P8400 2.26GHz or Intel® Atom™ N270 1.6GHz
- Windows® XP, 7, Embedded
- HDD or SSD CF card-selectable
- Fanless model is available
- Stainless model is available

Ethernet 2 ch
COM 2 ch
USB 5 ch
CF Card
PCI 1 ch or none
PCIe 1 ch or none
DVI-I
AC
DC

12"



PS-4700 (Z510 model)

- 1,024 x 768 pixels (XGA)
- Intel® Atom™ Z510 1.1GHz
- Windows® Embedded
- CF card
- Fanless model only
- Stainless model is available

Ethernet 1 ch
COM 1 ch
USB 3 ch
CF Card
PCI
PCIe
DVI-I
AC
DC

PS-4600

- 1,024 x 768 pixels (XGA)
- Intel® Core™ i3-3217UE 1.60 GHz or Intel® Celeron® M 827E 1.40 GHz
- Windows® XP, 7, Embedded
- HDD, SSD or CFast-selectable
- Fanless model is available

Ethernet 2 ch
COM 2 ch
USB 5 ch
CFast
PCI 1 ch or 2 ch or none
PCIe 1 ch or none
DVI-I
AC
DC

12"




PS-4600 Rear Mount Model

- 1,024 x 768 pixels (XGA)
- Intel® Core™ i3-3217UE 1.60 GHz or Intel® Celeron® M 827E 1.40 GHz
- Windows® XP, 7, Embedded
- HDD, SSD or CFast-selectable
- Fanless model is available

Ethernet 2 ch
COM 2 ch
USB 4 ch
CFast
PCI 1 ch or 2 ch or none
PCIe 1 ch or none
DVI-I
AC
DC

Built-in



PS-4000B

- Intel® Core™ 2 Duo P8400 2.26GHz or Intel® Atom™ N270 1.6GHz
- Windows® XP, 7, Embedded
- HDD, SSD or CF card-selectable
- Fanless model is available

Ethernet 2 ch
COM 2 ch
USB 5 ch
CF Card
PCI 1 ch or 2 ch
PCIe 1 ch or 3 ch or none
DVI-I
AC
DC



PE4000B N2600 Model

- Intel® Atom™ Dual Core N2600 1.6 GHz
- Windows® 2009, WES7
- SSD or CFast-selectable
- Fanless model only

Ethernet 3 ch
COM 6 ch
USB 5 ch
CFast
PCI
PCIe
RGB
HDMI
AC
DC



PE4000B N270 Model

- Intel® Atom™ N270 1.6 GHz
- Windows® 2009
- CF card
- Fanless model only

Ethernet 1 ch
COM 2 ch
USB 2 ch
CF Card
PCI
PCIe
RGB
HDMI
AC
DC

For further informations, visit our website.

<http://www.pro-face.com/product/ipc/index.html>



Industrial Flat Panel Monitor: FP5000_{SERIES}

Industrial Flat Panel Monitor

15"



FP-5700TPD

- 1,024 x 768 pixels (XGA)
- Resistive Film (analog, multi-touch)
- DVI-D

USB 3 ch

DC

12"



FP-5600TPD

- 1,024 x 768 pixels (XGA)
- Resistive Film (analog, multi-touch)
- DVI-D

USB 3 ch

DC

Regarding the acquisition of the international safety standards, visit Pro-face website.

WinGP - HMI screen data operable on a Windows PC


The IPC runtime engine, WinGP, can run screen data created for Pro-face HMI on GP-Pro EX software on a Windows PC. *1

*1: WinGP can be installed from GP-Pro EX DVD-ROM, only the license needs to be purchased.




Communication with Various Controllers

The system configuration which used to be built with PC, HMI and PLC can be built only with IPC and PLC.

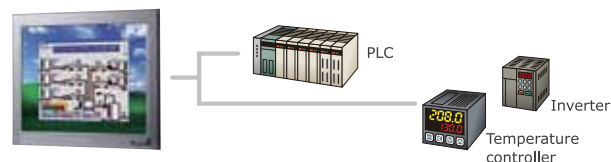

Downsize System Space

Communication drivers are included as standard so there is no need to develop drivers for communication with PLCs, temperature controllers, and other control devices.

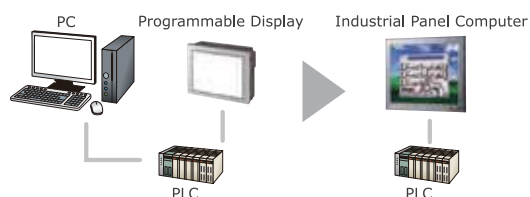

Combination with User Applications

Dedicated API allows for flexible integration with in-house PC applications.

For further informations, visit our website.

<http://www.pro-face.com/product/ipc/index.html>




Software: GP-Pro EX and Pro-face Remote HMI

GP-Pro EX

HMI Screen Editor & Logic Programming Software

Easy sharing of symbolized device data between HMI screen and control programs using drag and drop operation provides you with intuitive operation throughout the successful completion of a project.

Function Block control programming also eases your control system design with frequently used and specially defined control functions.

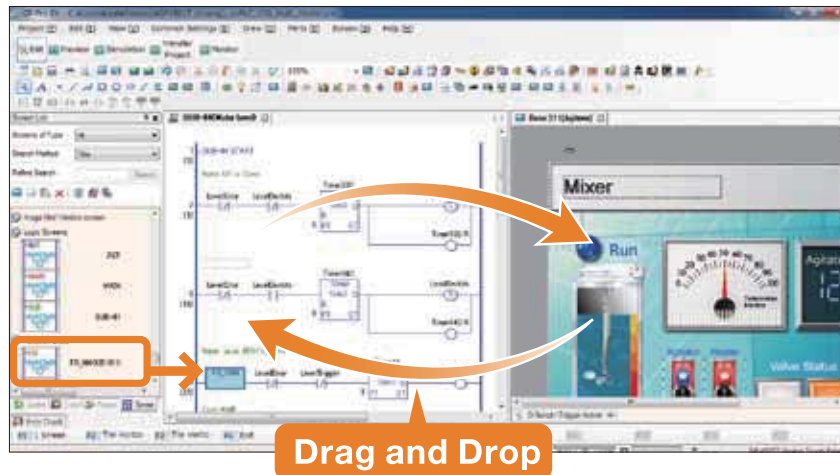

Pro-face Remote HMI

Remote Monitoring Software for mobile

Pro-face mobility solutions for remote access

Confirm the cause of an alarm directly with your mobile device and see if the machine can be put back into operation without going on site.

Operate Windows applications via a tablet or a smartphone with Pro-face Remote HMI Server installed on your IPC or PC.



For further informations, visit our website.


<http://www.pro-face.com/product/soft/remotehmi/index.html>



Alarm Analysis


When an error occurs, an operator can easily identify the conditions on-site by touching the alarm message.

This calls up the error-related data in chronological order.

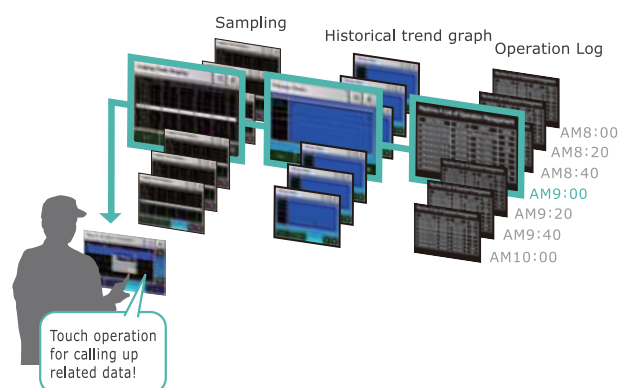


Enhanced Recipes

Develop recipes for specific devices that even combine diverse elements such as bit data, word data, and strings.

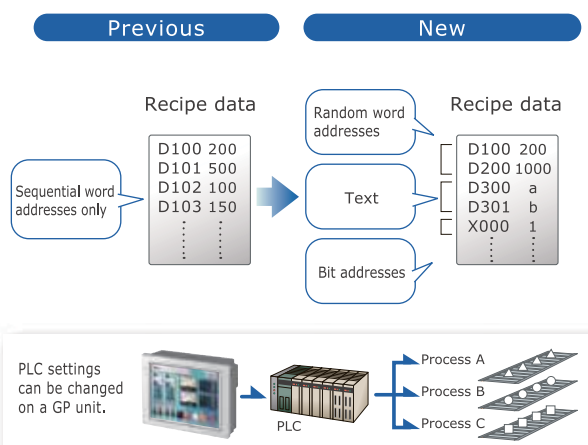

Easily Transfer


Screen data can be updated by using the data transfer tool, even without a software license.

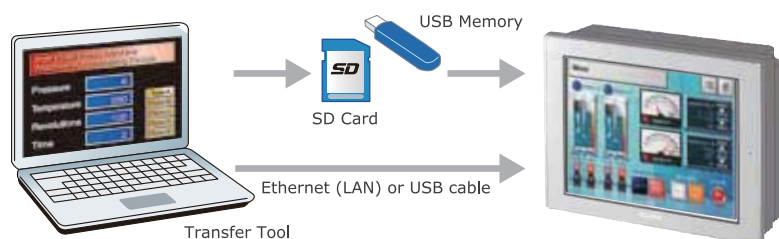

The data transfer tool can be downloaded for free from the Web
<http://www.pro-face.com/otasuke/download/>

A Wide Range of Device Connections

Using the Serial Interface and Ethernet Interface, you can manage all information from a single GP through simultaneous communication with up to four types of devices.

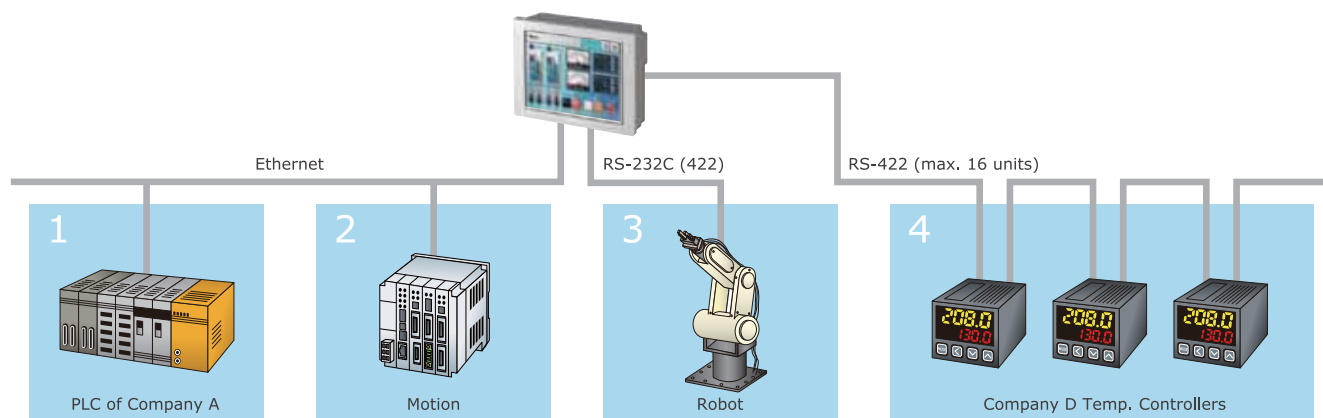


For further informations, visit our website.
<http://www.pro-face.com/product/soft/index.html>



Advanced Remote Monitoring Software Solutions


Data Management *Pro-Server EX*

Using GP-Pro EX as your platform, you can easily design screens at low cost that gather information on the display and connected equipment. *1

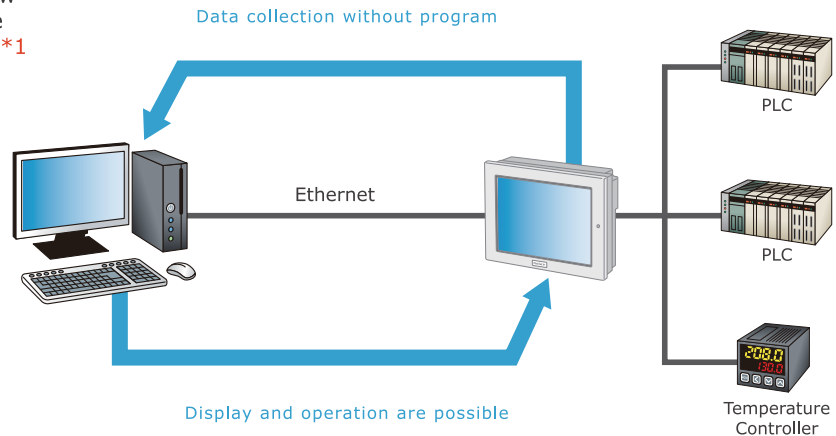

Camera Remote Monitoring *Camera-Viewer EX*


Camera-Viewer EX allows you to use an office PC to view in real-time, record and play video from a remote camera connected to a GP. *2

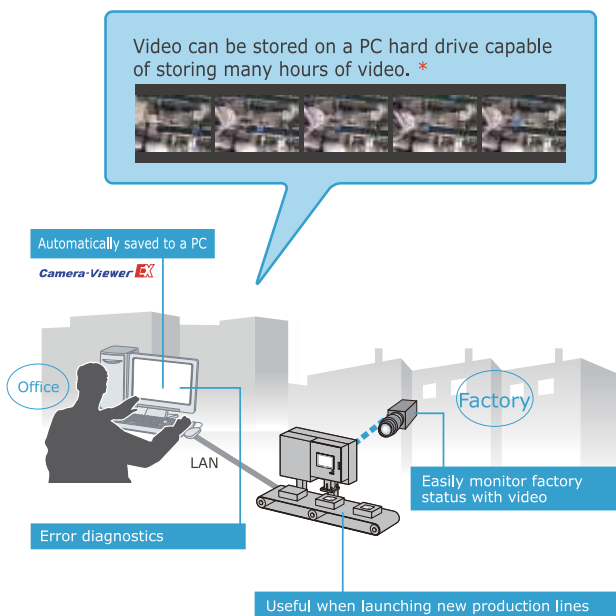

* A brief delay of about one second may occur during real-time monitoring.

Screen Remote Monitoring *GP-Viewer EX*

You can remotely monitor GP screens on computers far from the worksite. *2

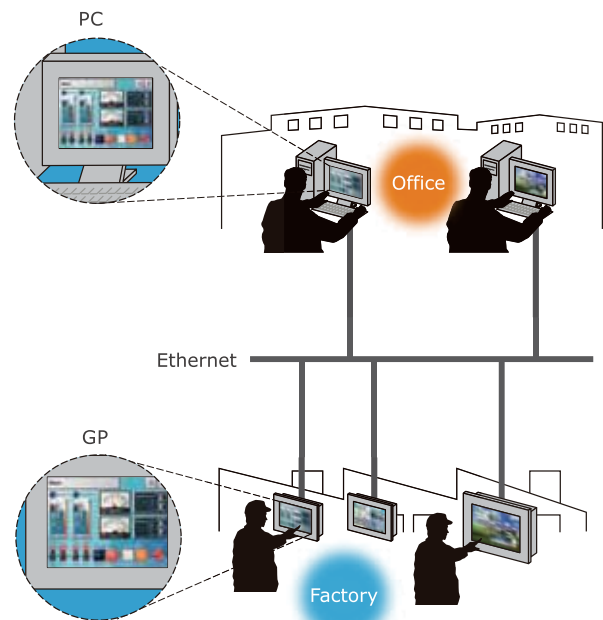

*1 To use Pro-Server EX, separate software must be purchased.

*2 To use GP-Viewer EX, Camera-Viewer EX, WinGP, RPA, a separate license must be purchased.



Connectable Devices

For further information of supported models and options, and cable diagrams, refer to PLC Connection Manual.

PLC	
Manufacture	Series
3S-Smart Software Solutions GmbH	CODESYS Control Win V3
Beckhoff Automation GmbH	Bus Terminal Controller: BC/BX series Embedded PC: CX series IPC/TwinCAT-SoftPLC IPC/TwinCAT3-Runtime
Control Techniques	MODBUS Slave Device, Unidrive SP
Control Technology Corp.	2700 Series
Crouzet Automatismes SAS	Millenium 3 Smart, Millenium 3 Essential
Delta-TAU data system, inc.	PMAC - PC/104, PMAC-Lite, PMAC-PC Turbo PMAC - Turbo PMAC1, Turbo PMAC2, Turbo Clipper, QM4C, Geo Brick Controller, Geo PMAC Driver, PC/104 Turbo, Turbo PMAC PCI, UMAC
FANUC LTD.	Fanuc Power Mate Series, Fanuc Power Mate I Series, Fanuc Series
Fatek Automation Corp.	FBs, FBe/FBn
Fuji Electric Co.,Ltd.	MICREX-F, MICREX-SX SPH
GE Intelligent Platforms	Series 90-30, Series 90-70, VersaMaxMicro, PACSystemRX7i
Hitachi Industrial Equipment Systems Co., Ltd.	EHV+, H, EH-150, MICRO-EH, Web Controller, Micro-EHV
Hitachi, Ltd.	S10V, HIDIC-S10a, S10mini
IEC Standard	TELVENT, Selta STCE
JTEKT Corporation	TOYOPUC-PC2/PC3J/PC3JT/PC3/PC10G
KEYENCE CORPORATION	KV-700/1000/3000/5000/5500/7000, KV Series, KV Nano Series, Virtual KV Series
KOYO ELECTRONICS INDUSTRIES CO., LTD.	KOSTAC SG/SU/SZ/PZ3/SR, DL-205/305/405, Direct Logic05/06
Lenze Vertrieb GmbH	Controller 3200C
LS Industrial Systems Co., Ltd.	GLOFA Series, K1000S, K300S, K200S, K120S, K80S, XGK, XGT, XGB
MEIDENSHA CORPORATION	UNISEQUE
Mitsubishi Electric Corporation	MELSEC AnA, MELSEC AnN, MELSEC Q (A mode), MELSEC QnA, MELSEC Q, MELSEC L, MELSEC FX, MELSEC A, MELSEC iQ-R, MELSEC iQ-F
Mitsubishi Heavy Industries, Ltd.	DIASYS Netmation, UP/V
OMRON Corporation	SYSMAC C/a/CV/CS1/CJ1/CJ2/CP1/CP1E/CS/NJ
Panasonic Industrial Devices SUNX Co., Ltd.	FP
Rockwell Automation, Inc.	SLC500, PLC-5, Control Logix, Micro Logix, Compact Logix
Saia-Burgess Controls Ltd.	PCD1, PCD2, PCD3, PCD4, PCD6
Schneider Electric SA	Nano, Micro, Premium, Twido, Quantum, Momentum, MODBUS communication devices
Sharp Manufacturing Systems Corporation	JW10, JW20H, JW30H, JW50H, JW70H, JW100H, JW300
SICK AG	FX3-CPU0, FX3-CPU1
Siemens AG	SIMATIC S7-200/S7-300/S7-400/S7-1200/S7-1500, 90U - 115U Series, 135U/155U Series, S5 Series, , LOGO! Series
Siemens Building Technologies	SAPHIR
TOSHIBA CORPORATION	T Series, V Series, EX Series
TOSHIBA MACHINE CO., LTD.	TC200, TC200S, TCmini
YASKAWA Electric Corporation	Control Pack, MP900, MP2000, MEMOCON GL, MEMOCON SC, MEMOCON Micro, MP3000
Yokogawa Electric Corporation	FA-M3, FCN, FCJ

Temperature Controller	
Manufacture	Series
CHINO CORPORATION	DB, KP, LT, JU, JW
Fuji Electric Co., Ltd.	PXH, PXG, PXR (AutoFIX), PXR (NoAutoFIX), PUM
OMRON Corporation	THERMAC NEO, THERMAC, In-Panel NEO
RKC INSTRUMENT INC.	CB, FB400/FB900, HA400/HA900, MA900, MA901, SRV, SRX, SA100, SA200, SR Mini HG(H-PCP-A/B), SR Mini HG (H-PCP-A), HG (H-PCP-J), SRZ (Z-TIO), SRZ (Z-DIO), SRZ (Z-CT), SRZ (Z-COM), REX-F9000, REX-F, REX-D, REX-G9, REXP300, REXP250, REX-AD, REX-PG, AE500, LE100
Shinko Technos Co., Ltd.	C, FC, FIR, GC, JC, AC, NC, DC, FCL, PC-900
Azbil Corporation (formerly Yamatake Corporation)	SDC10, SDC15, SDC20, SDC21, SDC25, SDC26, SDC30, SDC31, SDC35, SDC36, SDC40A, SDC40B, SDC40G, SDC45, SDC46, DMC10, DMC50, DCP31, DCP32, DCP551, DCP552, CMC10B,NX
Yokogawa Electric Corporation	Temperature Controllers UT100 Series, Digital Indicating Controllers UT2000

Inverter/Servo	
Manufacture	Series
Fuji Electric Co.,Ltd.	FRENIC5000G11S, FRENIC5000P11S, FVR-E11S, FVR-C11S, FRENIC-MEGA, FRENIC-Mini, FRENIC-Eco, FRENIC-Multi
Hitachi Industrial Equipment Systems Co., Ltd.	L300P, SJ300, SJ700, SJ700-2, SJH300, HFC-VAH3, X200, SJ200, L200, WJ200
Mitsubishi Electric Corporation	FR-A700, FR-A701, FR-E700, FR-F700, FR-A500, FR-C500, FR-A500L, FR-E500, FR-F500, FR-F500J, FR-F500L, FR-S500, FR-V500, FR-V500L, FR-B,B3(A500), FR-B,B3(A700)
Sanmei Electronics Co., LTD	Si2, CutyAxis2, CutyAxis3
Toshiba Schneider Inverter Corporation	TOSVERT VF-S15, TOSVERT VF-AS1
YASKAWA Electric Corporation	Varispeed AC, Varispeed F7, Varispeed F7S, Varispeed G7, Varispeed L7, VS mini J7, VS mini V7/VS-606V7, V1000, J1000, A1000, Analog Voltage/Pulse Train Reference Type SERVOPACKs For Rotary Servomotors, Analog Voltage/Pulse Train Reference Type SERVOPACKs For Linear Servomotors, Σ-V Series Rotary Motors (M-II), Σ-V Series Linear Motors (M-II), Σ-V Series Rotary Motors (M-III), Σ-V Series Linear Motors (M-III), Σ-7 Series 1-axis Servo Pack (M-II), Σ-7 Series 1-axis Servo Pack (M-III), Σ-7 Series 2-axis Servo Pack (M-III)

Industrial Robot	
Manufacture	Series
DENSO WAVE INCORPORATED	RC7M Controller, RC8 Controller
Estic Corporation	Handy 2000
Hyundai Heavy Industries	Hi4 Robot, Hi5 Robot
IAI Corporation	PCON, ACON, SCON, ERC2, ROBONET X-SEL(Linear Actuator Controller), X-SEL(SCARA Robot Controller), SSEL, ASEL, PSEL, Table-Top Actuator
Seiko Epson Corporation	RC700 Series
SMC Corporation	LECP6, LECA6
TOSHIBA MACHINE CO., LTD.	TC mini/TC200 Series, TS1000/2000/2100/3000/3100 Series
YASKAWA Electric Corporation	DX100/DX200 Series, FS100/FS100L Series
Yamaha Motor Co., Ltd.	TS-S, TS-X, TS-P

Other Devices	
Manufacture	Series
Azbil Corporation (formerly Yamatake Corporation)	PBC Series, CMS Series, CMF Series, CMQ-V Series, MPC Series, MVF Series, CML Series, AUR350C Series, AUR450C Series, RX Series, BC-R, K1G Series
Cognex Corporation	In-Sight 5000/7000 Series Vision Systems, In-Sight Micro Vision Systems
Digital Electronics Corporation	PC or Micro computer board etc., SIO communication devices, Ethernet communication devices
Modbus-IDA	MODBUS Compatible External Device, MODBUS Slave Device
M-System Co., Ltd.	R7G4HML3-LC2
ODVA (Open DeviceNet Vendor Association, Inc.)	EtherNet/IP communication devices
YASKAWA Electric Corporation	M-System Co., Ltd. Remote I/O, Azbil Corporation K1G Series

For further informations, visit our website.

<http://www.pro-face.com/product/soft/gpproex/driver/driver.html>



Pro-face

by **Schneider Electric**

All *eyes* on the customer make us "the best interface"

*i*ntimacy

Connect intimately
with our customers
and stakeholders

*i*nnovation

Provide benefits to
our customers
through innovation

*i*nteraction

Enhance customer
experience through
positive interaction

⚠ WARNING

HAZARD OF OPERATOR INJURY, OR UNINTENDED EQUIPMENT DAMAGE

Before operating any of these products, be sure to read all related manuals thoroughly.

Failure to follow these instructions can result in death, serious injury or unintended equipment damage.

- For printing purposes, the colors in this catalog may differ from those of the actual unit.
- Actual user screens may differ from the screens shown here.
- Electric equipment should be installed, operated, serviced, and maintained only by qualified personnel.
- All product names used in this catalog are the registered trademarks or trademarks of their respective companies.
- All information contained in this catalog is subject to change without notice.
- No responsibility is assumed by Digital for any consequences arising out of the use of this material.

Global Headquarters
Digital Electronics Corporation
Osaka, JAPAN
Tel: +81 (0)6 6208-3133
Fax: +81 (0)6 6208-3136
www.pro-face.com
info@pro-face.com

Indonesia
Pro-face Indonesia
Ventura Building • 7th Floor, Jl. RA Kartini Kav.26,
Cilandak, Jakarta Selatan 12430 Indonesia
Tel / Fax: +62 21 750 4496
www.proface.co.id
info@proface.co.id

South Korea
Pro-face Korea Co., Ltd.
Seoul, SOUTH KOREA
Tel: +82 (0)2 2630 9850
Fax: +82 (0)2 2630 9860
www.proface.co.kr
proface@proface.co.kr

European Headquarters
Pro-face Europe B.V.
Hoofddorp, THE NETHERLANDS
Tel: +31 (0)23 55 44 099
Fax: +31 (0)23 55 44 090
www.proface.eu
info@proface.eu

Italy
Pro-face Italia S.p.a.
Bovisio Masciago (Milano), ITALY
Tel: +39 (0)362 59 96 1
Fax: +39 (0)362 59 96 69
www.proface.it
info@proface.it

Spain and Portugal
Pro-face España
Cardedeu (Barcelona), SPAIN
Tel: +34 (0)93 846 07 45
Fax: +34 (0)93 845 48 68
www.proface.es
info@proface.es

Australia and New Zealand
Pro-face Australia
Mt. Waverley, AUSTRALIA
Tel: +61 (0)3 9550 7396
Fax: +61 (0)3 9550 7390
www.pro-face.com.au www.pro-face.co.nz
pfau@pro-face.com

North America
Pro-face America, Inc.
Ann Arbor, MI U.S.A
Tel: +1 734 477 0600
Fax: +1 734 864 7347
www.profaceamerica.com
info@profaceamerica.com

Taiwan
Pro-face Taiwan
Taipei, TAIWAN
Tel: +886 (0)2 2657 1121
Fax: +886 (0)2 2657 1021
www.proface.com.tw
proface@proface.com.tw

Austria
Pro-face Europe B.V.(Austria Office)
Hagenberg, AUSTRIA
Tel: +43 7236 3343 620
FAX: +43 7236 3343 629
www.proface.at
info@proface.at

Denmark
Pro-face Northern Europe ApS
Roskilde, DENMARK
Tel: +45 70 22 01 22
Fax: +45 70 22 01 33
www.proface.dk
info@proface.dk

Sweden
Pro-face Sweden AB
Löddeköpinge (Malmö), SWEDEN
Tel: +46 46 540 90 70
Fax: +46 46 71 27 90
www.proface.se
info@proface.se

China
Pro-face China International Trading Co., Ltd.
Shanghai, P. R. CHINA
Tel: +86 (0)21 6361 5175
Fax: +86 (0)21 6361 5176
www.proface.com.cn
proface@proface.com.cn

Singapore
Pro-face Singapore
TechPoint, Singapore
Tel: +65-6832-5533
Fax: +65-6415-1605
www.proface.sg
info@proface.sg

France
Pro-face France S.A.S.
Mitry-Mory, FRANCE
Tel: +33 (0)1 60 21 22 91
Fax: +33 (0)1 60 21 22 92
www.proface.fr
info@proface.fr

Poland
Pro-face Europe B.V.(Warsaw
Office)
Warszawa, POLAND
Tel: +48 (22) 465 66 62
Fax: +48 (22) 465 66 67
www.proface.pl
info@proface.pl

Switzerland
Pro-face Schweiz GmbH
Regensdorf, SWITZERLAND
Tel: +41 (0)43 343 7272
Fax: +41 (0)43 343 7279
www.proface.ch
info@proface.ch

India
Pro-face India
Bangalore, INDIA
Tel: +91 80 4333 3540/3541
Fax: +91 80 4333 3222
www.proface.co.in
sales.proface@proface.co.in

South-East Asia Pacific
Pro-face South-East Asia Pacific Co.,Ltd.
Bangkok, THAILAND
Tel: +66 (0)2 617 5678
Fax: +66 (0)2 617 5688
www.proface.co.th
pfsales@proface.co.th

Germany
Pro-face Deutschland GmbH
Solingen, GERMANY
Tel: +49 (0)212 258 260
Fax: +49 (0)212 258 2640
www.proface.de
info@pro-face.de

Russia
Pro-face Europe B.V. (Russia Office)
Saint-Petersburg, RUSSIA
Tel: +7 (812) 336 47 06
Fax: +7 (812) 336 47 18
www.pro-face.ru
info@pro-face.ru

United Kingdom
Pro-face UK Ltd
Coventry, ENGLAND
Tel: +44 (0)2476 511288
Fax: +44 (0)2476 511499
www.proface.co.uk
info@proface.co.uk



SCIGATE AUTOMATION (S) PTE LTD

No.1 Bukit Batok Street 22 #01-01 Singapore 659592

Tel: (65) 6561 0488

Fax: (65) 6562 0588

Email: sales@scigate.com.sg

Web: www.scigate.com.sg

Business Hours: Monday - Friday 8.30am - 6.15pm